



Material



Die cast zinc

Finish

Powder coated

Colour

Black

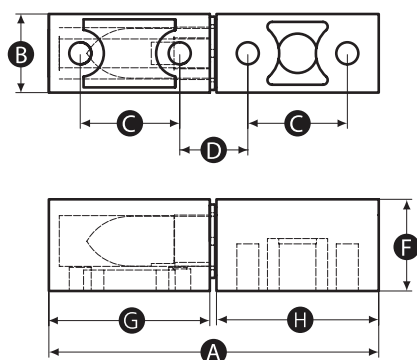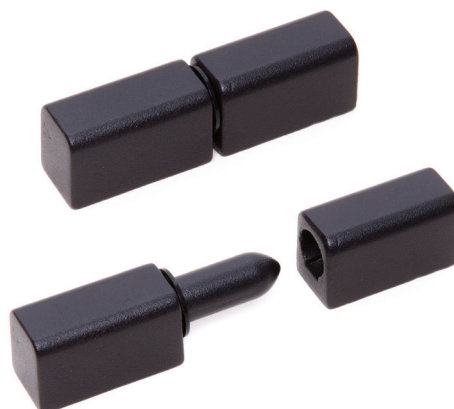

Part No.	A	B	C	D	E	F	G	H	Thread size	Min. thread depth
15766S	63	15	19	13	-	17.5	30.75	31	M5	4.5

Part No.	Radial load (N)	Axial load (N)	Recommended tightening torque (Nm)	Approx. shear force per screw (kN)
15766S	400	1150	1.5	0.28

Mounting options

- A** Install hinges with matching vertical orientation to enable quick, easy and safe removal of doors without the use of tools.

B Install hinges with opposing vertical orientation to enable doors to be permanently mounted.

