


Material

Zinc plated steel or stainless steel AISI 303

Note

Locking nuts are not included as standard

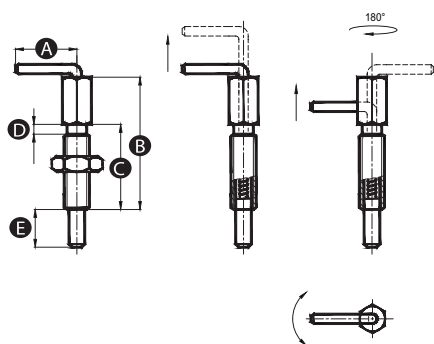

Part No.	A	B	C	D	E	Thread size	Plunger diameter	Material	Rest position
16963T	16	32	20	2.5	9.5	M6	4	Zinc Plated Steel	No
16964P	19.5	42	27	3.1	12	M8	5	Zinc Plated Steel	No
16965W	24	51	33.5	3.7	14	M10	6	Zinc Plated Steel	No
16966S	32	54	31.8	4.3	19	M12	8	Zinc Plated Steel	No
16967Z	33.5	77.5	50.5	5	25	M16	10	Zinc Plated Steel	No
16968V	16	32	20	2.5	9.5	M6	4	Stainless steel	No
16969R	19.5	42	27	3.1	12	M8	5	Stainless steel	No
16970Y	24	51	33.5	3.7	14	M10	6	Stainless steel	No
16971U	32	54	31.8	4.3	19	M12	8	Stainless steel	No
16972Q	33.5	77.5	50.5	5	25	M16	10	Stainless steel	No
16973X	16	32	20	2.5	9.5	M6	4	Zinc Plated Steel	Yes
16974T	19.5	42	27	3.1	12	M8	5	Zinc Plated Steel	Yes
16975P	24	51	33.5	3.7	14	M10	6	Zinc Plated Steel	Yes
16976W	32	54	31.8	4.3	19	M12	8	Zinc Plated Steel	Yes
16977S	33.5	77.5	50.5	5	25	M16	10	Zinc Plated Steel	Yes
16978Z	16	32	20	2.5	9.5	M6	4	Stainless steel	Yes
16979V	19.5	42	27	3.1	12	M8	5	Stainless steel	Yes
16980R	24	51	33.5	3.7	14	M10	6	Stainless steel	Yes
16981Y	32	54	31.8	4.3	19	M12	8	Stainless steel	Yes
16982U	33.5	77.5	50.5	5	25	M16	10	Stainless steel	Yes